
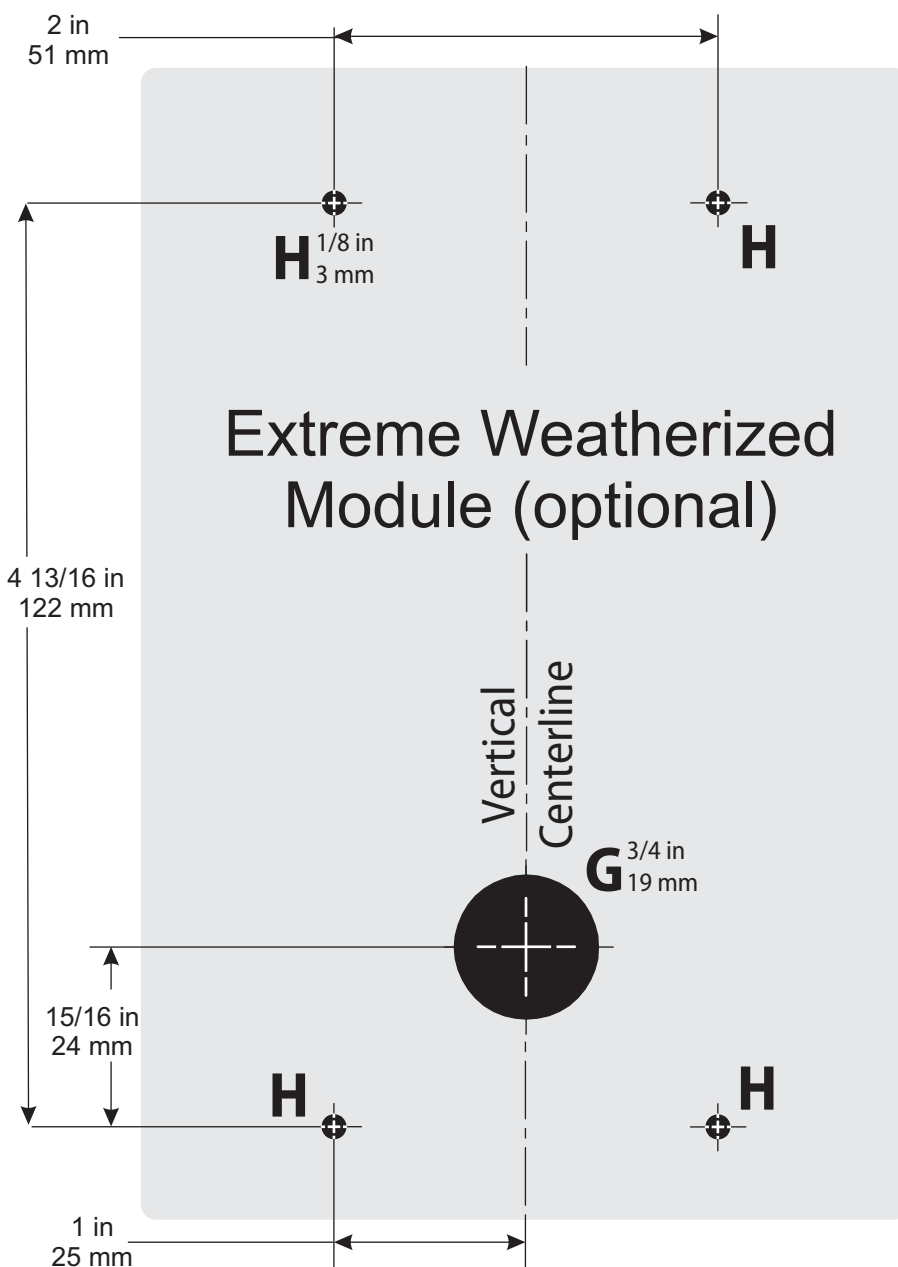


Inside door preparation

For use with Corbin Russwin exit devices

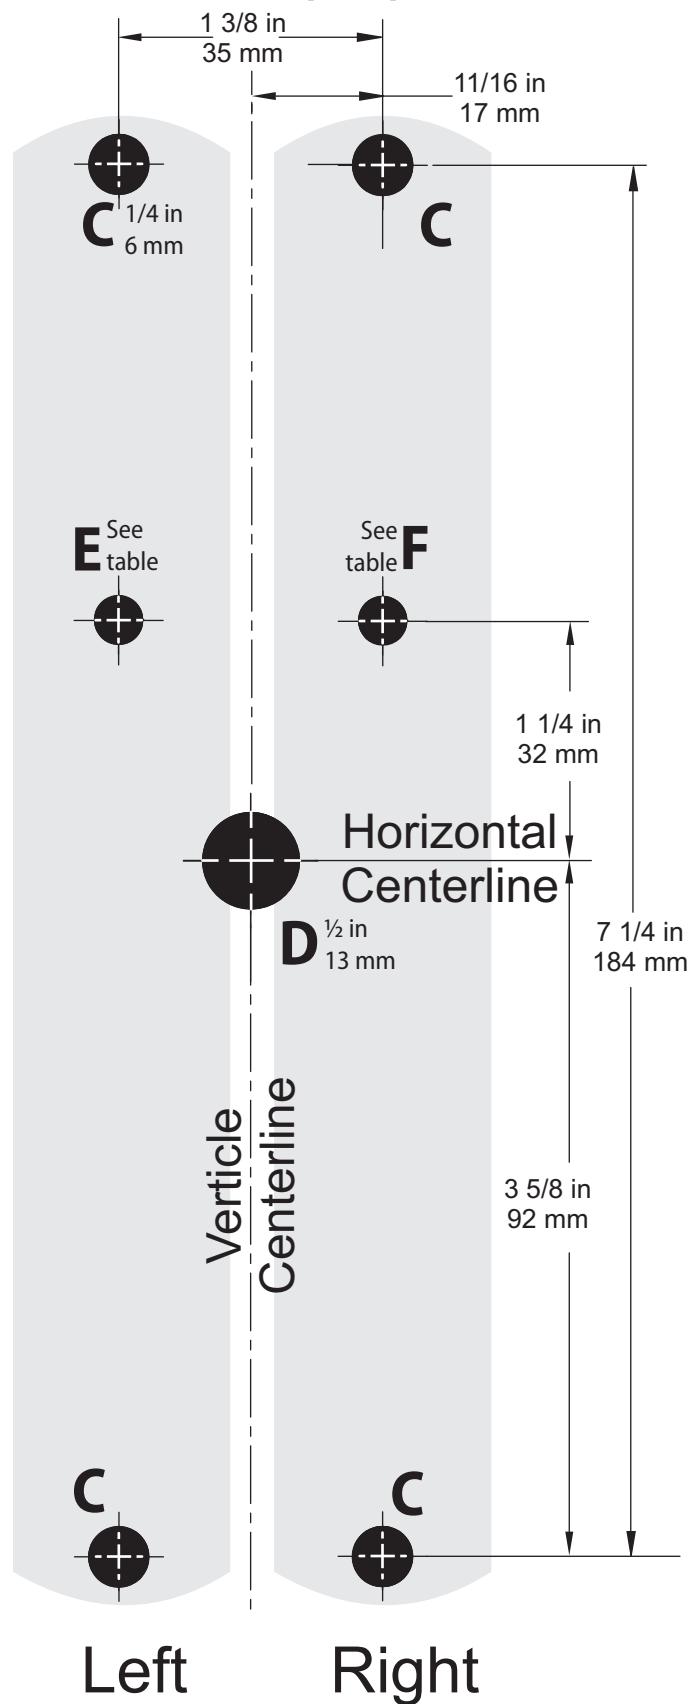

Align the Extreme Weatherized module template as close to the exit device chassis as practical.

Instructions:


- This template is for use on new construction, or doors that have previously used the following Corbin Russwin Exit Device:
Rim Exit Series ED5200A;
Vertical Rod Series ED5470VB; or,
Concealed Vertical Rod Series ED5860B.
- Revised the hole pattern on the door to the pattern on this template. If the existing holes on the door are larger than on this template, they may be used if they meet the exit device manufacturer's specifications.
- Reinstall the exit device on the door using holes E or F as applicable. Reinstall the end cap mounting bracket using the original hardware.
- If you are replacing Corbin Russwin trim style T13, install the special SNB (sex bolt), finish washer and #10-24 x 7/8 inch oval head screw to fill the lower handle hole.
- Refer to *Installation Instructions for Stanley Omnilock QAXOM Exit Device Locks (T83325)* for installation of the Omnilock Quick Adapter.

Hole	Diameter	Depth	Additional Information
A	13/32 in (10 mm)	1 9/16 in (40 mm)	For mounting post
	15/32 in (12 mm)	1/4 in (6 mm)	Counter sink
B	1 7/8 in (46 mm)	13/16 in (21 mm)	Bearing clearance hole
C	5/16 in (8 mm)	Through door	Exit device and adapter mount
D	1/2 in (13 mm)	Through door	Tailpiece access hole
E	Metal : #10-24 tap Wood: 1/8 in (3 mm)	Metal: Through one side Wood: 1 in (25 mm)	Left hand door
F			Right hand door
G	3/4 in (19 mm)	Through one side	For Extreme Weatherized models on hollow metal door only
H	1/8 in (3 mm)		
J	3/4 in (19 mm)		

Title Installation Template for QAXOM used with Corbin Russwin CY1 Exit Device				STANLEY OMNILOCK		
Series QAXOM	Backset ----	Trim style ----	Door thickness ---	Rev date 02/2010	Template number OM6	Rev A

Outside door preparation

For use with Corbin Russwin exit devices

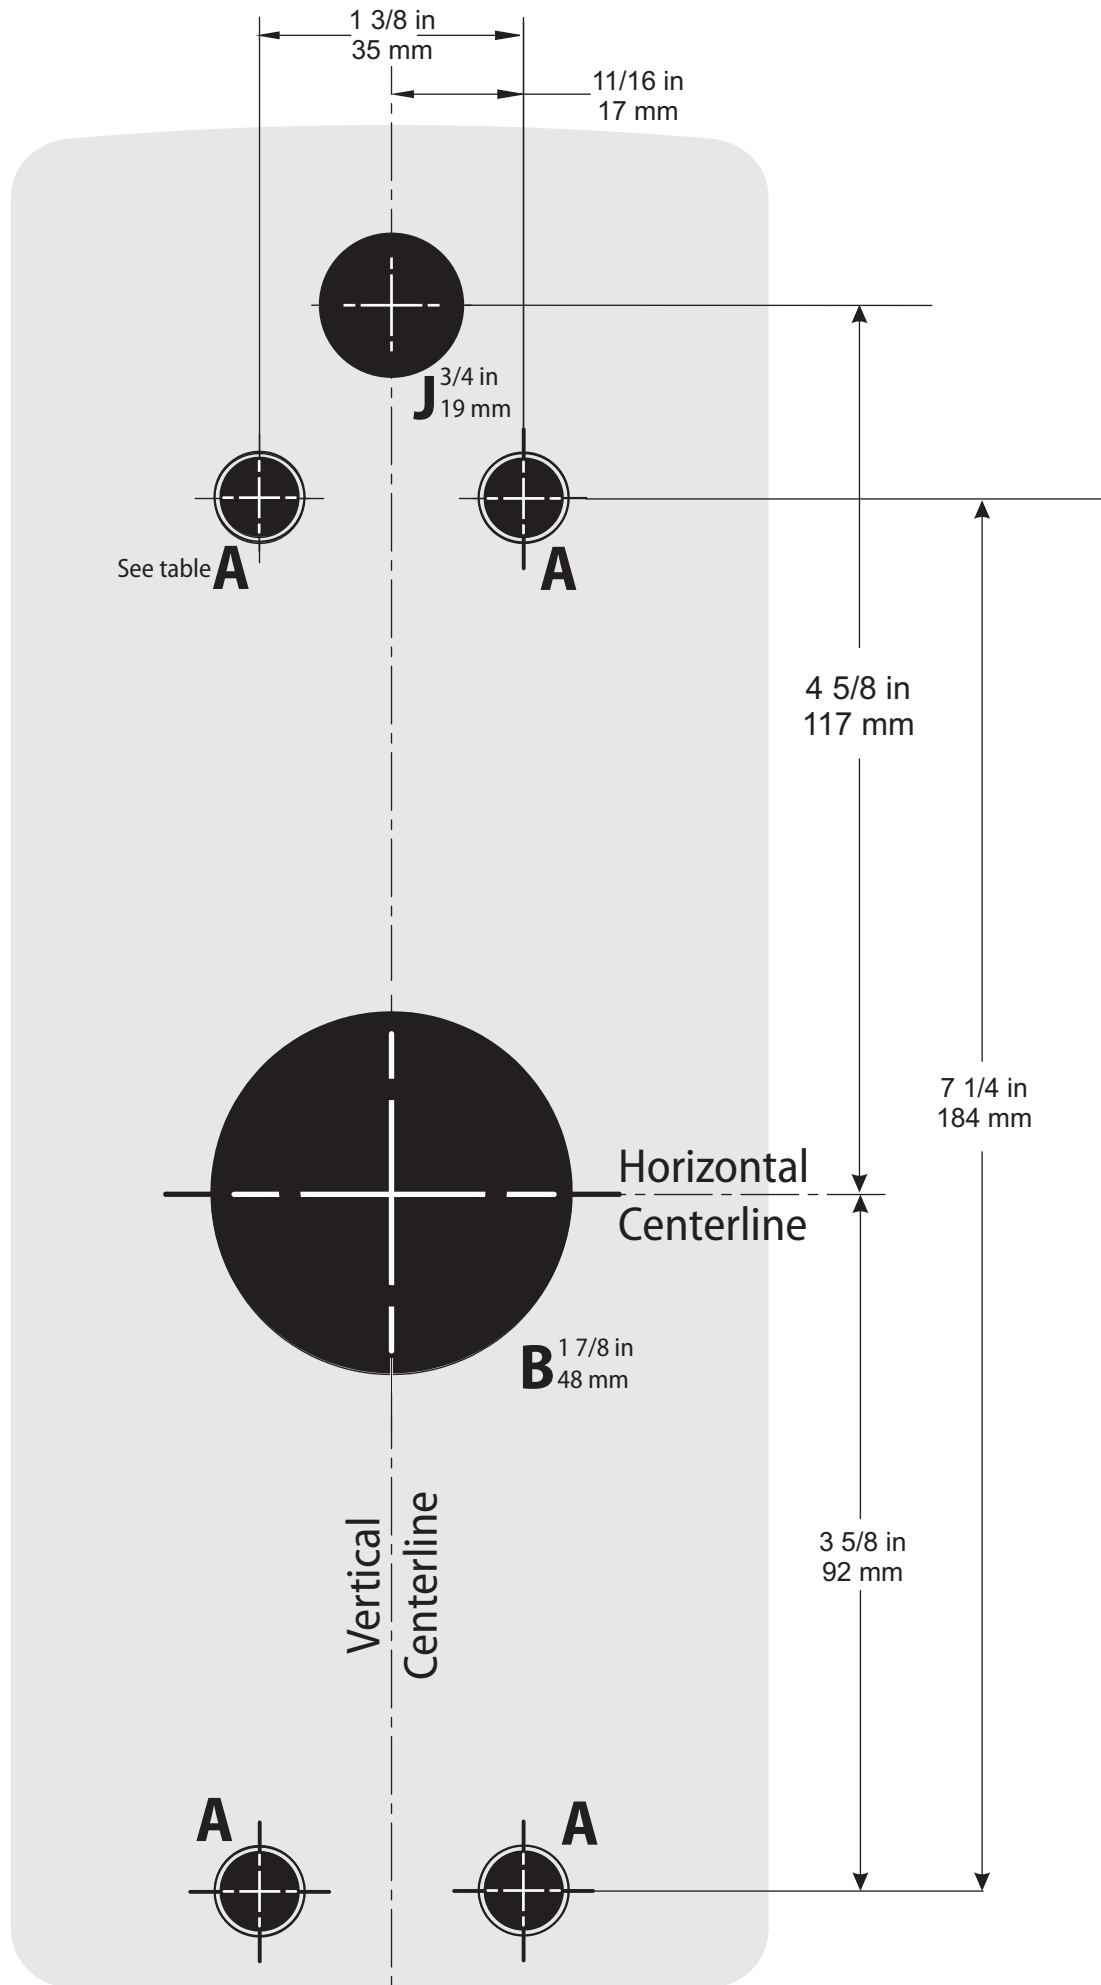

Hole	Diameter	Depth	Additional Information
A	13/32 in (10 mm)	1 9/16 in (40 mm)	For mounting post
	15/32 in (12 mm)	1/4 in (6 mm)	Counter sink
B	1 7/8 in (46 mm)	13/16 in (21 mm)	Bearing clearance hole
C	5/16 in (8 mm)	Through door	Exit device and adapter mount
D	1/2 in (13 mm)	Through door	Tailpiece access hole
E	Metal : #10-24 tap Wood: 1/8 in (3 mm)	Metal: Through one side Wood: 1 in (25 mm)	Left hand door
F			Right hand door
G	3/4 in (19 mm)	Through one side	<i>For Extreme Weatherized models on hollow metal door only</i>
H	1/8 in (3 mm)		
J	3/4 in (19 mm)		