


HOLE TABLE			
SCREW	SYMBOL	DESCRIPTION	PAGE
	A	13/32" DIA. x 1-9/16" DEEP	2
	B	15/32" DIA. C'DRILL x 1/4" DEEP	2
	B	1-7/8" DIA. x 13/16" DEEP	2
#10-24X1-1/8" PHMS	C	1/4" DIA.	1
	D	1/2" DIA	1
#10-24 SEX BOLT	E	13/32" DIA.	1 & 2

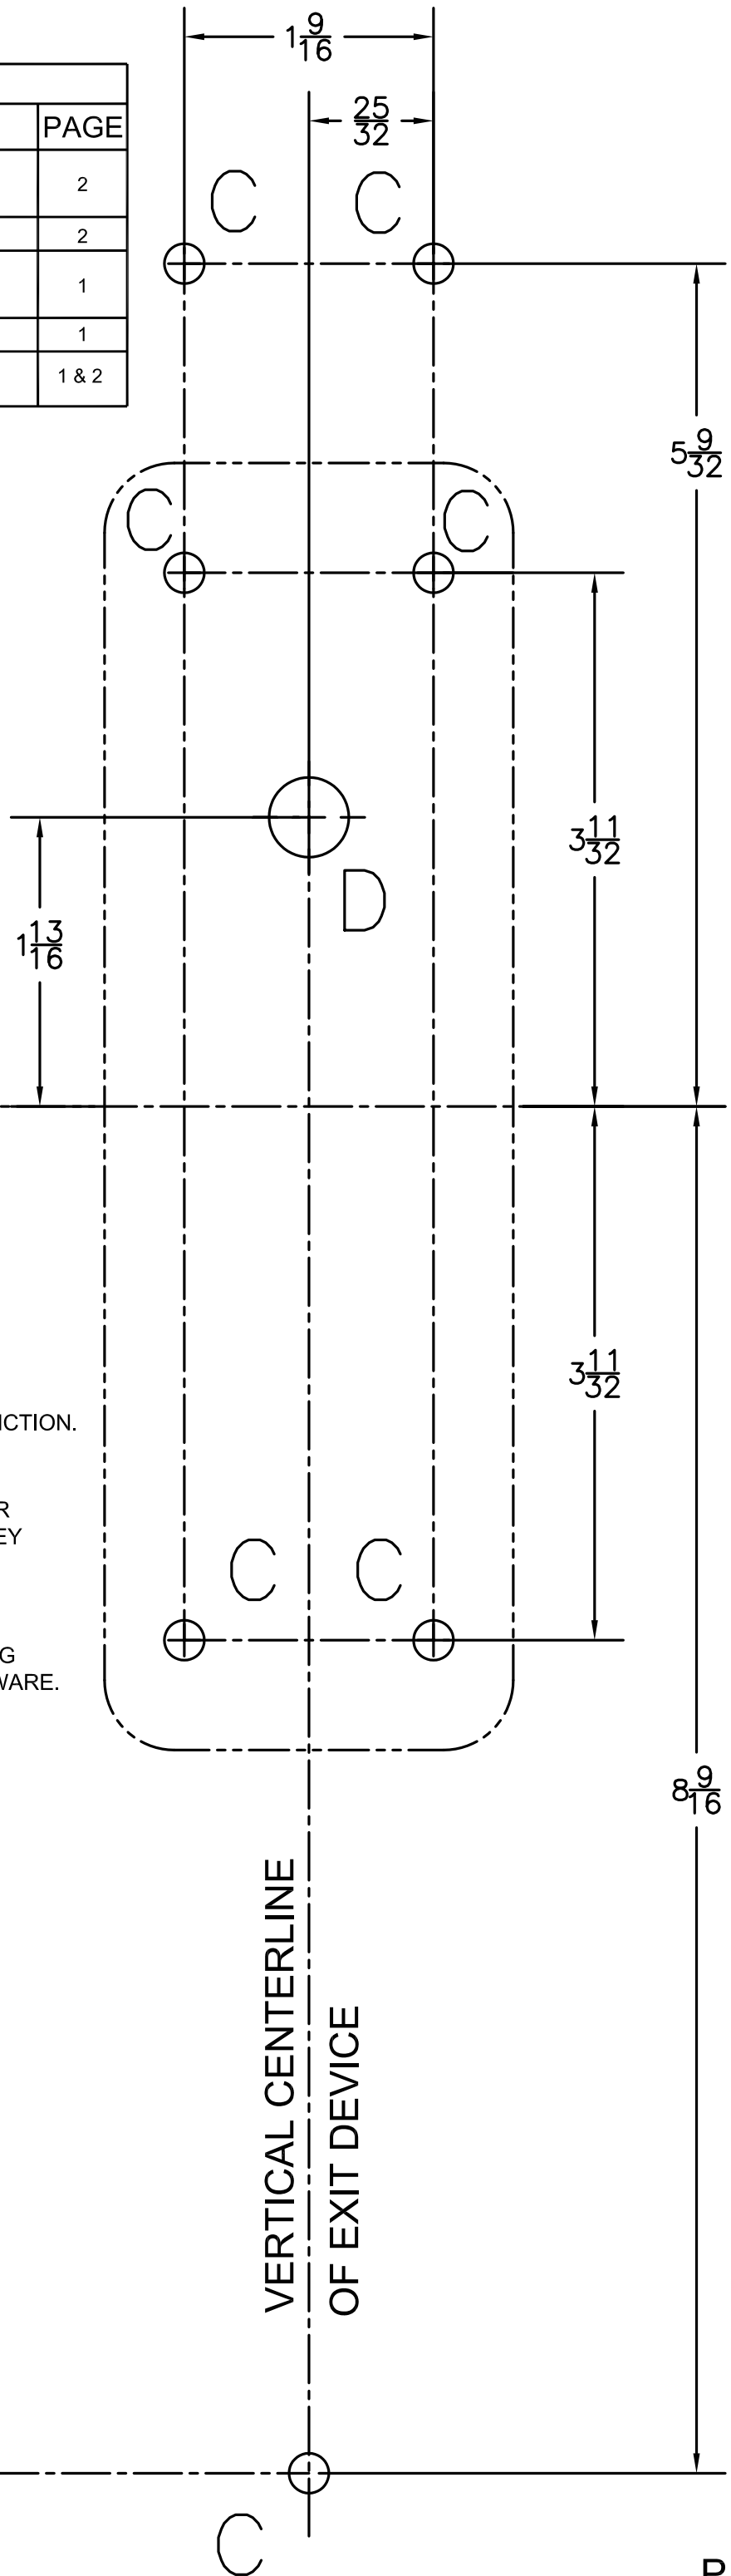

HORIZONTAL CENTERLINE
OF EXIT DEVICE

NOTES:

1. THIS TEMPLATE IS FOR USE ON DOORS THAT PREVIOUSLY HAVE BEEN PREPARED FOR PRECISION HARDWARE INC. EXIT DEVICE SERIES FL-1100, FL-1200, FL-1700 USING TRIM 15, 17, 17C, 20, 20C OR IF THE DOOR PREVIOUSLY DID NOT HAVE TRIM. THE EXIT DEVICE MUST HAVE THE NIGHT LATCH FUNCTION.
2. REVISE THE HOLE PATTERN IN THE DOOR TO THE HOLE PATTERN OF THIS TEMPLATE. IF THE EXISTING HOLES IN THE DOOR ARE LARGER THAN THOSE SHOWN THEY MAY BE USED IF THEY MEET THE EXIT DEVICE MANUFACTURER'S SPECIFICATIONS.
3. REINSTALL THE EXIT DEVICE ON THE DOOR USING HOLES "E" AND REINSTALL THE MOUNTING BRACKET/END CAP USING THE ORIGINAL HARDWARE.
4. REFER TO THE OMNILOCK QUICK ADAPTER EXIT TRIM INSTALLATION INSTRUCTION TO INSTALL THE OMNILOCK QUICK ADAPTER AND THE EXIT DEVICE ON THE DOOR.

TEMPLATE FOR USE WITH OMNILOCK® QA EXIT TRIM SERIES
WHEN REPLACING PRECISION HARDWARE TRIM MODEL SERIES
15, 17, 17C, 20, 20C FOR EXIT DEVICE MODEL SERIES FL-1100,
FL-1200, FL-1700.



INSIDE DOOR PREP

