



HOLE TABLE			
SCREW	SYMBOL	DESCRIPTION	PAGE
	A	13/32" DIA. x 1-9/16" DEEP 15/32" DIA. C'DRILL x 1/4" DEEP	2
	B	1-7/8" DIA. x 13/16" DEEP	2
#10-24X1-1/8" PHMS	C	1/4" DIA.	1
	D	1/2" DIA.	1
#10-24 SEX BOLT	E	13/32" DIA.	2

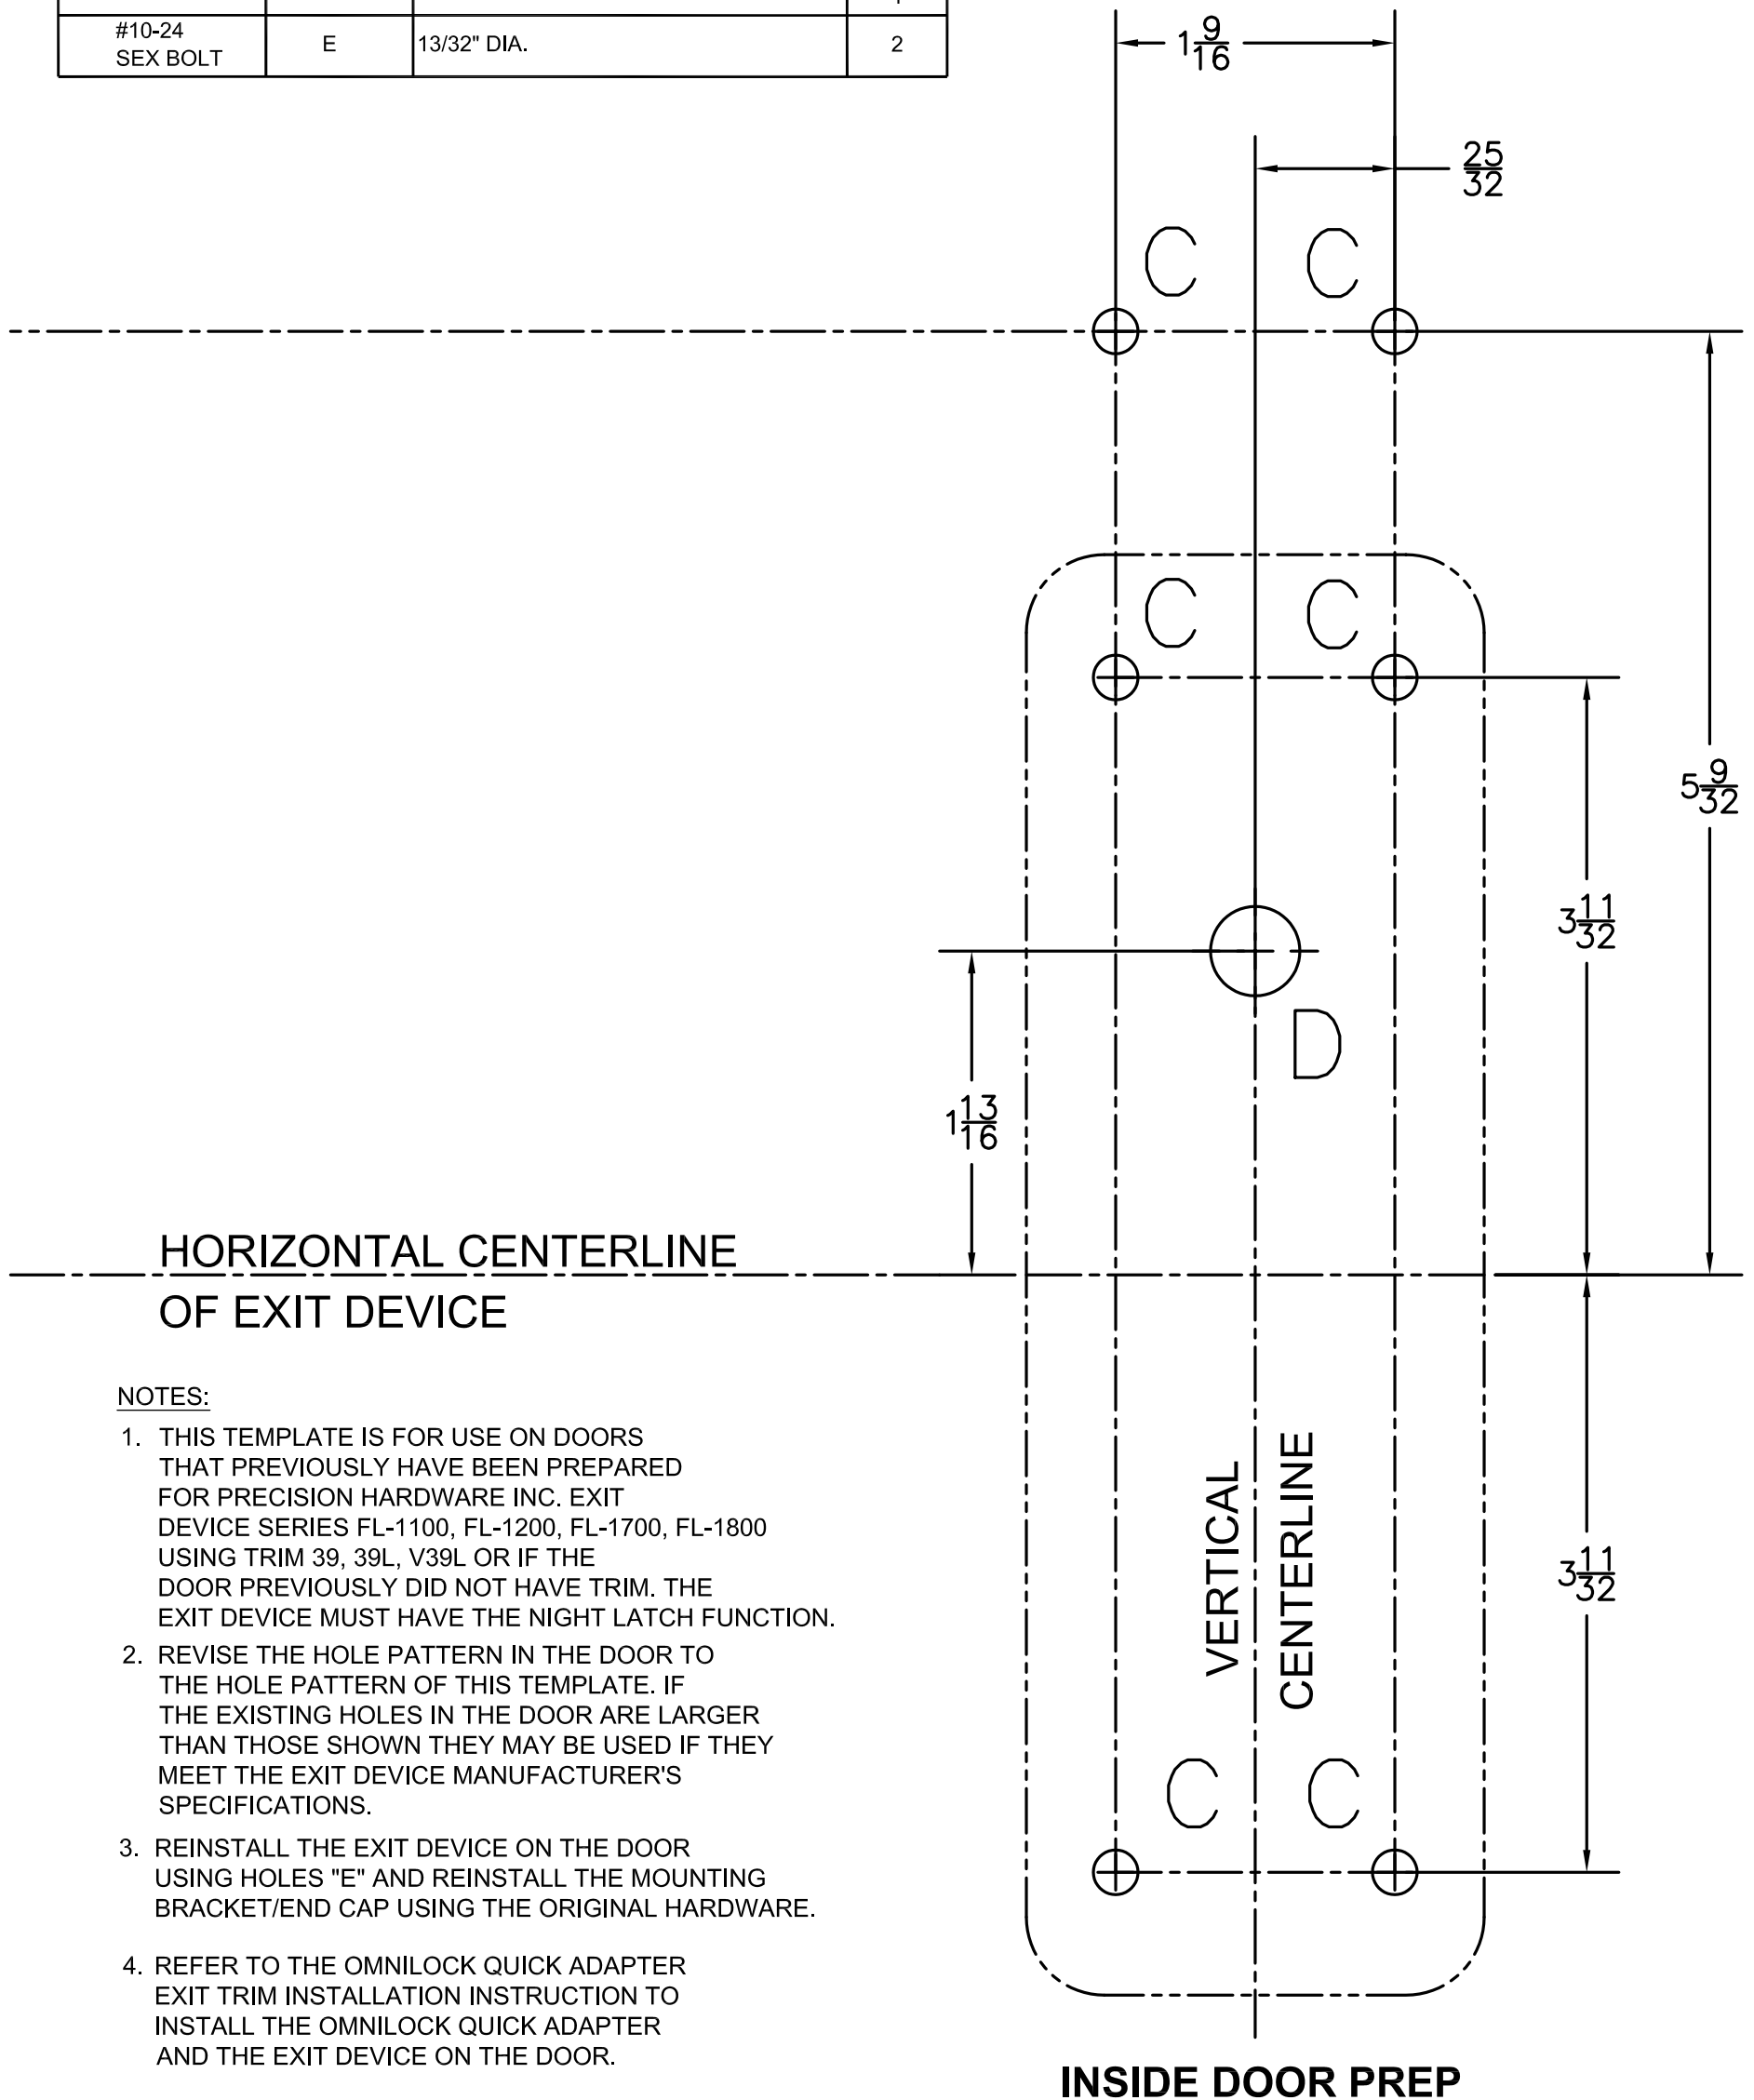

**NOTES:**

1. THIS TEMPLATE IS FOR USE ON DOORS THAT PREVIOUSLY HAVE BEEN PREPARED FOR PRECISION HARDWARE INC. EXIT DEVICE SERIES FL-1100, FL-1200, FL-1700, FL-1800 USING TRIM 39, 39L, V39L OR IF THE DOOR PREVIOUSLY DID NOT HAVE TRIM. THE EXIT DEVICE MUST HAVE THE NIGHT LATCH FUNCTION.
2. REVISE THE HOLE PATTERN IN THE DOOR TO THE HOLE PATTERN OF THIS TEMPLATE. IF THE EXISTING HOLES IN THE DOOR ARE LARGER THAN THOSE SHOWN THEY MAY BE USED IF THEY MEET THE EXIT DEVICE MANUFACTURER'S SPECIFICATIONS.
3. REINSTALL THE EXIT DEVICE ON THE DOOR USING HOLES "E" AND REINSTALL THE MOUNTING BRACKET/END CAP USING THE ORIGINAL HARDWARE.
4. REFER TO THE OMNILOCK QUICK ADAPTER EXIT TRIM INSTALLATION INSTRUCTION TO INSTALL THE OMNILOCK QUICK ADAPTER AND THE EXIT DEVICE ON THE DOOR.

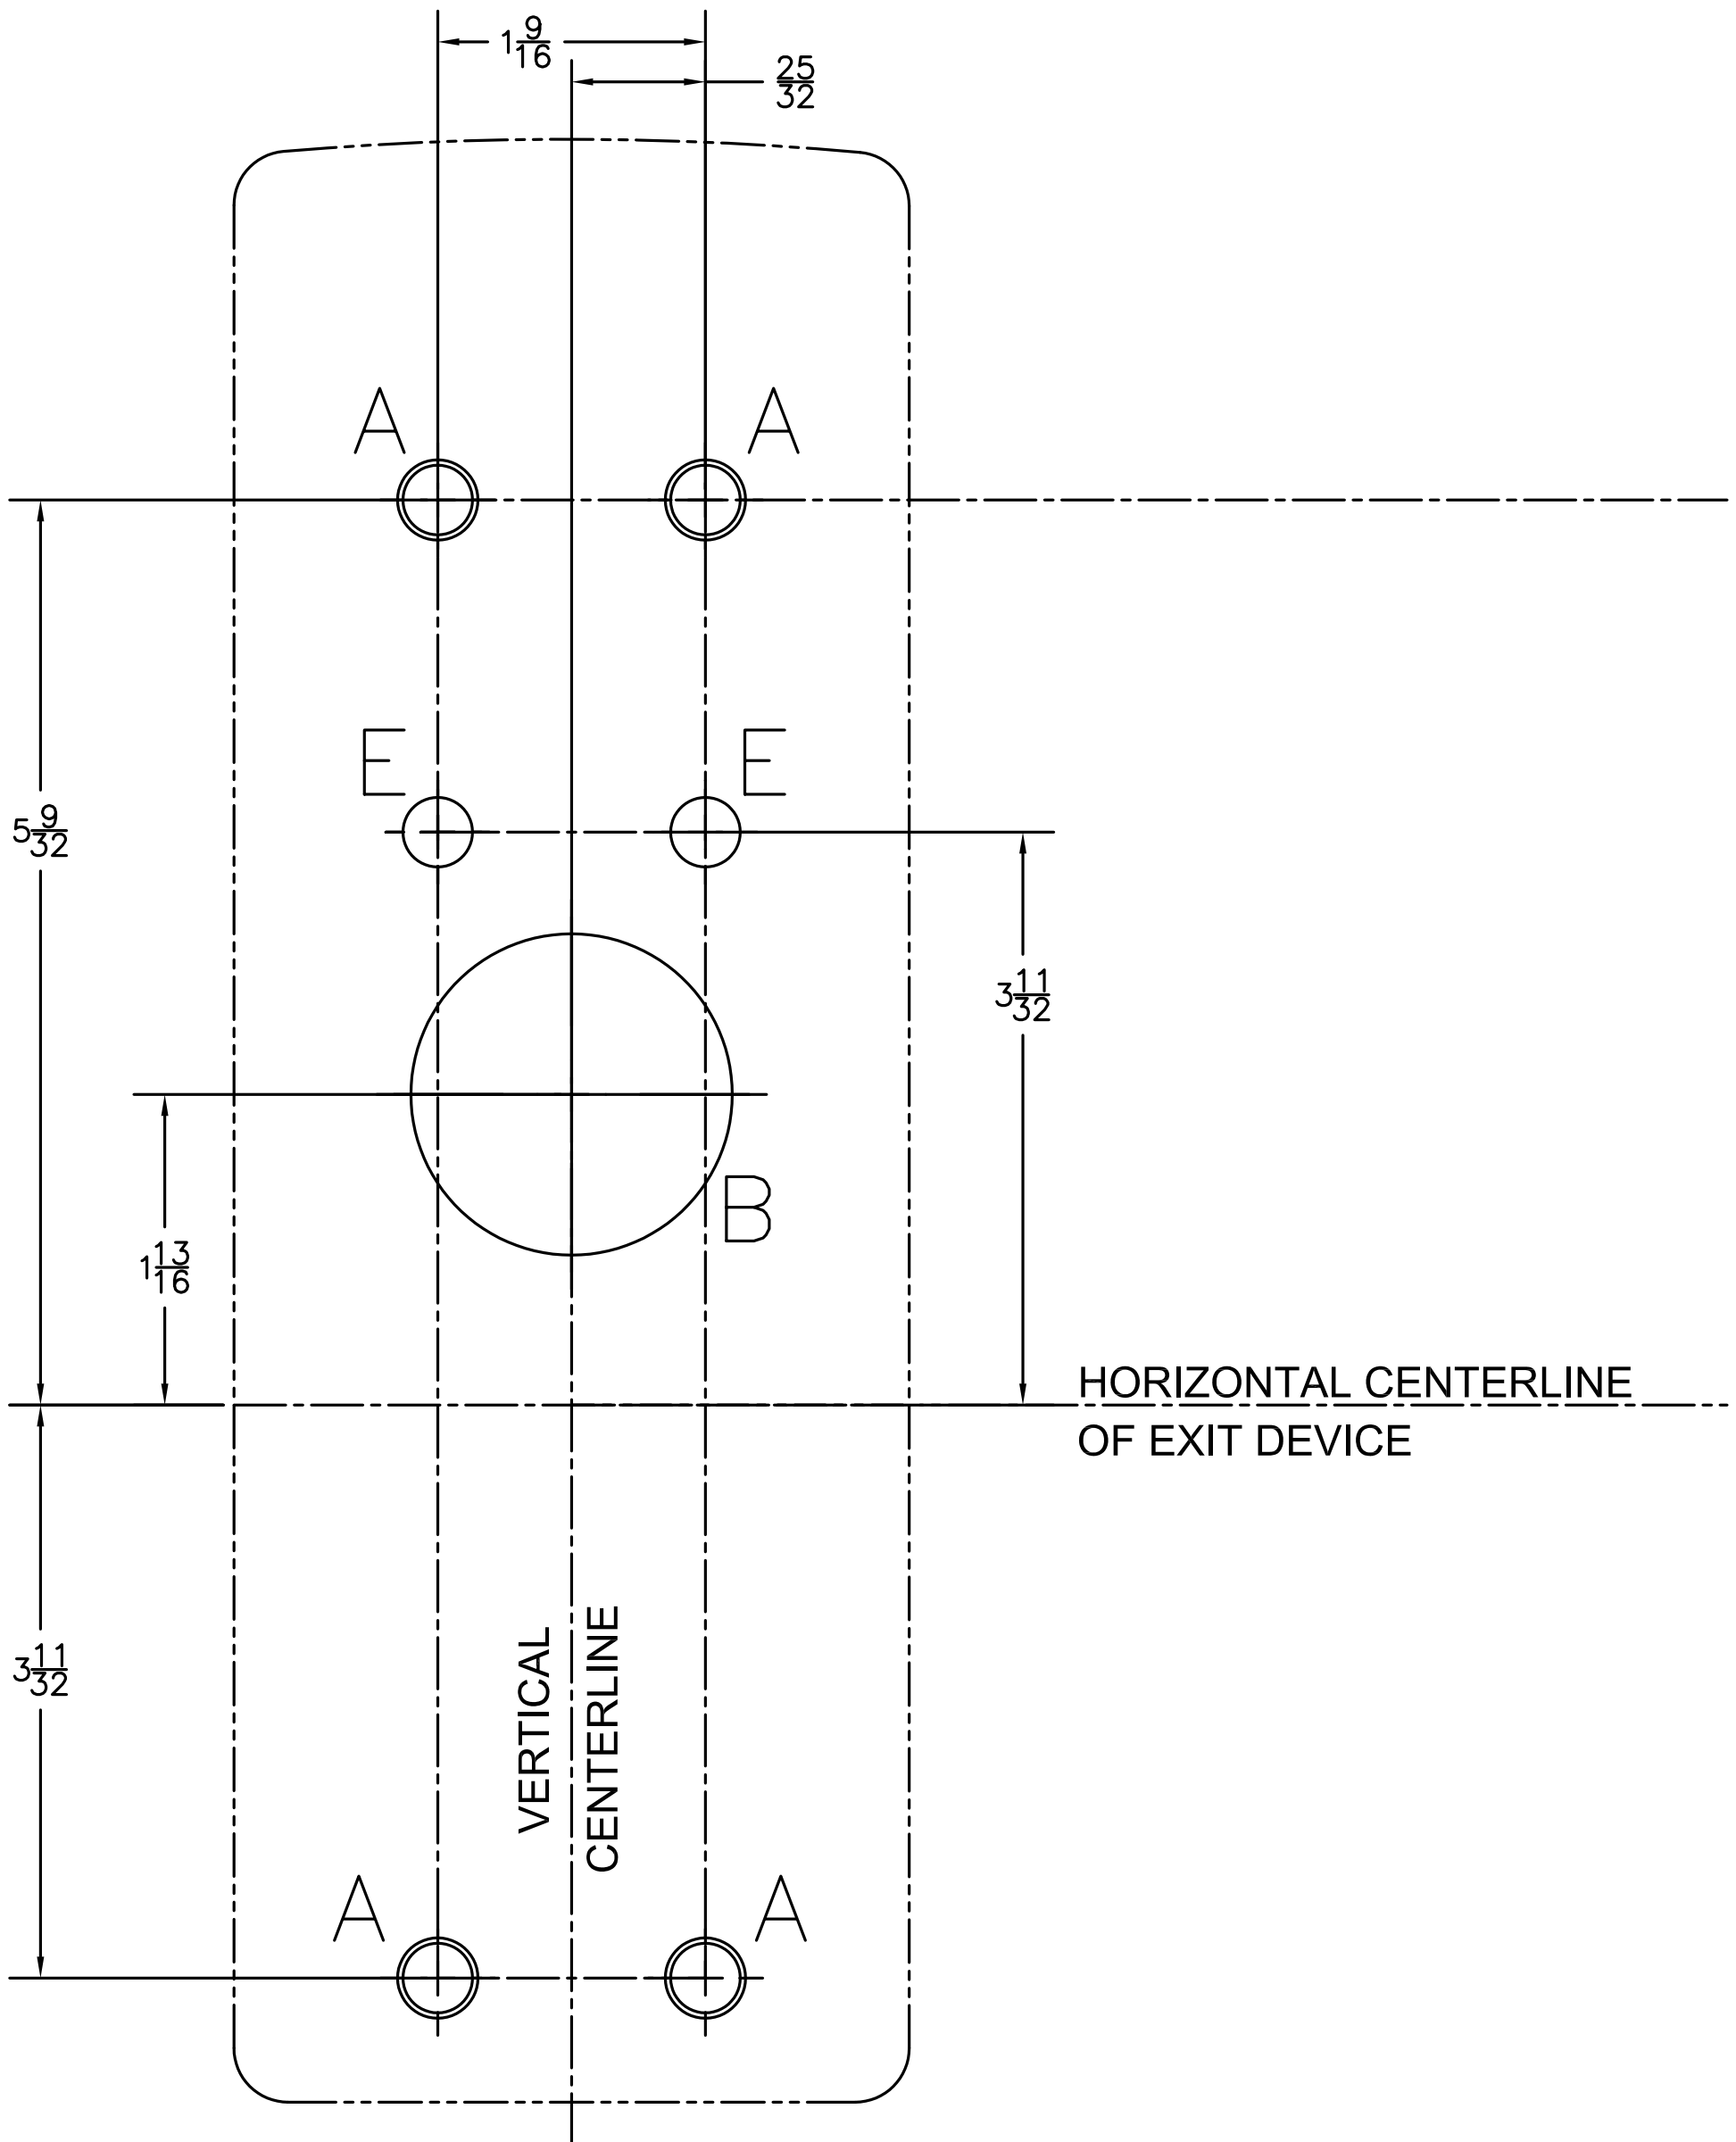

**OUTSIDE DOOR PREP**